
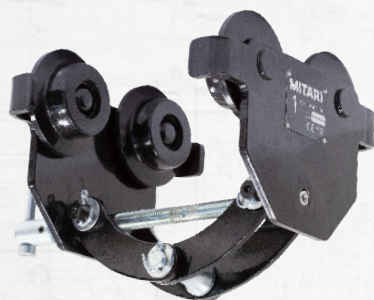


Trolley clamp | MVB | 1.000 - 5.000 kg

- The distance between the wheels is easy to adjust and can be used on many kinds of I-beams
- It can be driven in a small turning diameter
- It travels along the lower edge of the I-beam
- The wheels are ball-bearing for smooth operation
- The trolley has compact design and a rod as attachment point
- Easy to instal by turning the spindle

Type	MVB
Brand	Mitari
Temperature range	-10 °C to + 40 °C
Norm hoist	NEN-EN 12100-1/2
HS code	8716800000

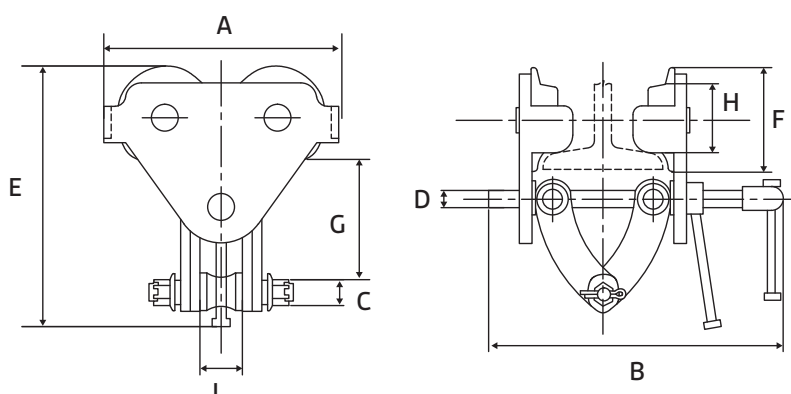

WLL kg	Beam width mm	Min. radius curve m	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	K mm	Weight kg
1.000	58 - 220	1	300	242	190	112	22	68	97	105	29	9.5
2.000	66 - 220	1.2	314	287	218	133	30	81	110	127	40	13.5
3.000	74 - 320	1.3	324	318	260	150	33	95	13	145	47	23.5
5.000	74 - 220	1.4	340	372	290	175	40	110	145	165	60	36